


RG-56E
Heavy duty granulator




RG-66S
Heavy duty granulator

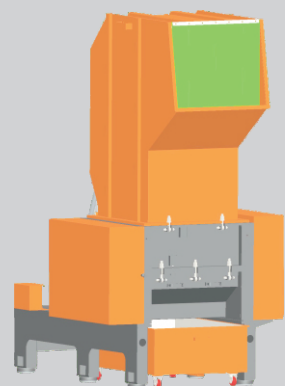

Description:

Heavy-duty granulator is suitable for crushing different kinds of heavy wall fittings, pipes, profiles, sheet, blocks, high impact applications, thicker material head, plastic container, package material and cable etc.

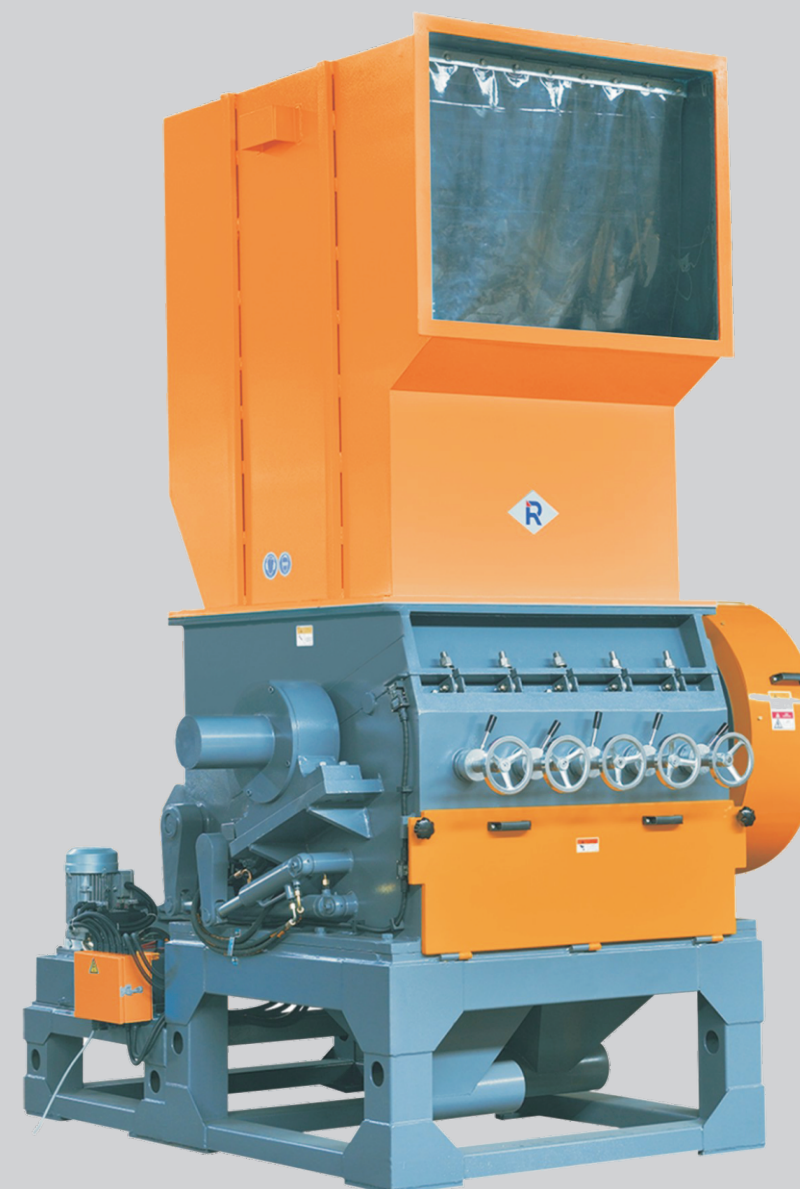

Ningbo Beilun Rhong Machinery Manufacturing Co., Ltd

Donggangqi, Xiaogang Subdistrict, Beilun,
Ningbo, Zhejiang Province, China.
T +86-574-55019010 · 0086 137 7723 9417
F +86-574-55019017
E-mail: rhong@rhongmachines.com



WECHAT



WEBSITE



更多咨询请访问:

www.rhongmachines.com

RG-56E
Heavy duty granulator

RG-66S
Heavy duty granulator

Heavy duty granulator

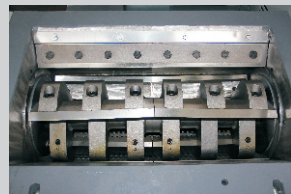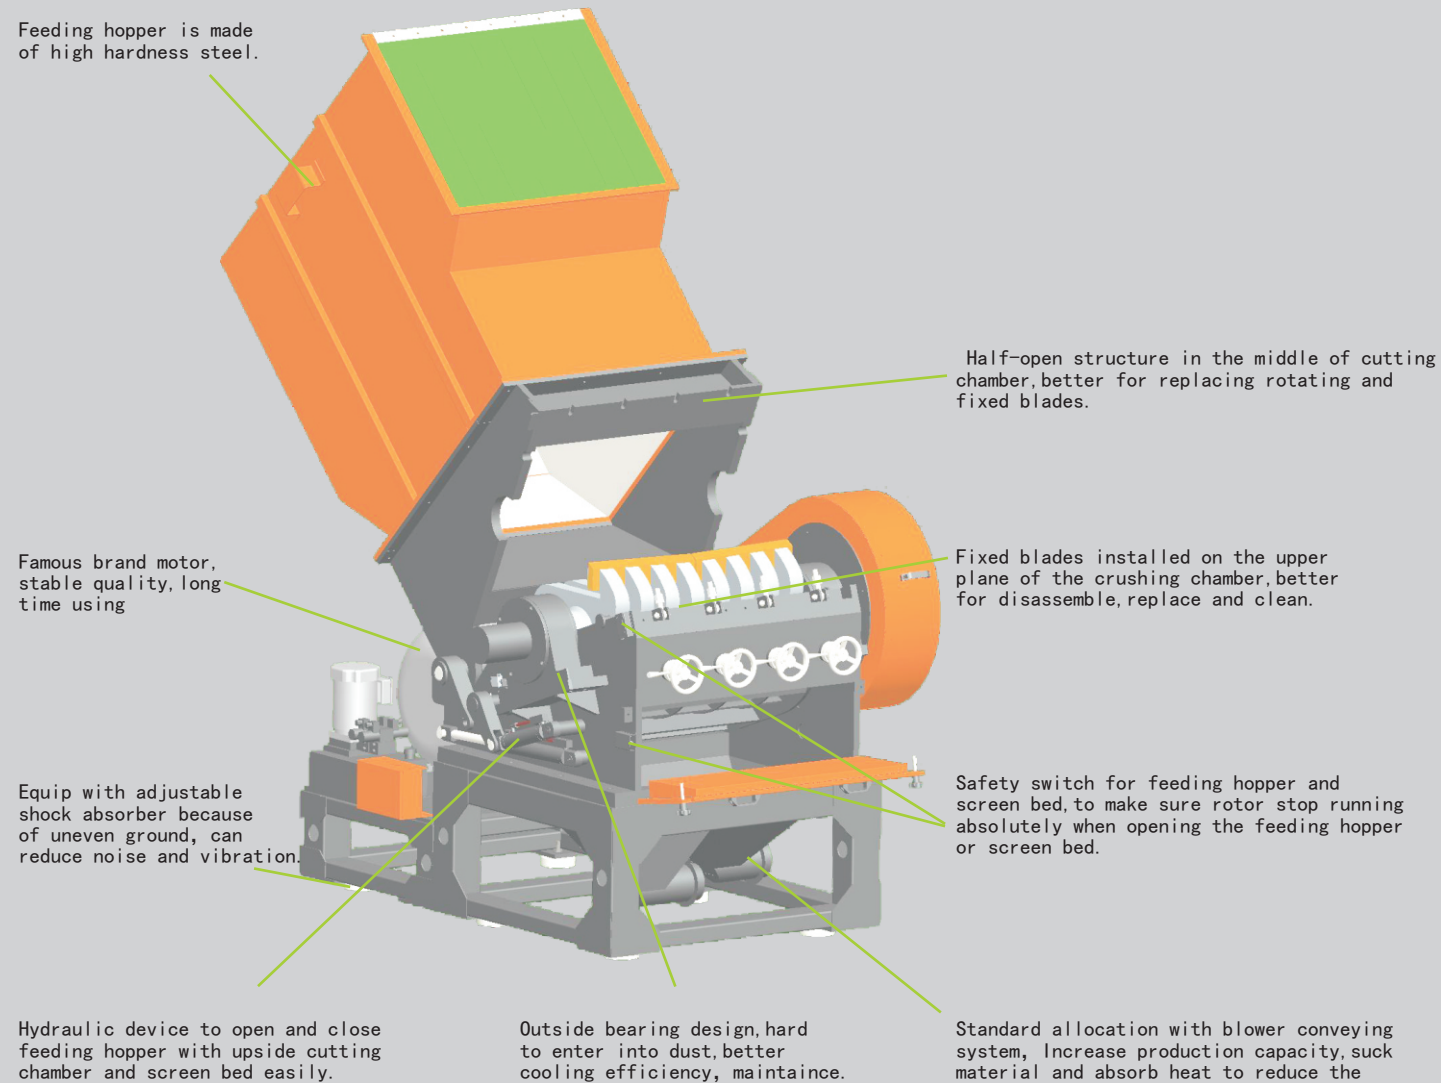


RG-66S
Paddle blades type

V type arrangement design, during crushing process, material will be crushed in claw blades center point, avoid friction and blockage between material and side wall.




Independent control box design, easy to move the correct place according to customer requirement. Overload device to protect motor.

Heavy duty granulator
Installation diagram
----blower system

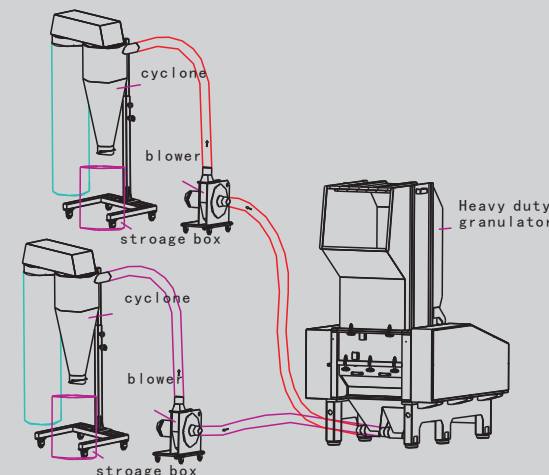

Heavy duty granulator
Installation diagram
----blower system
+dedusting system

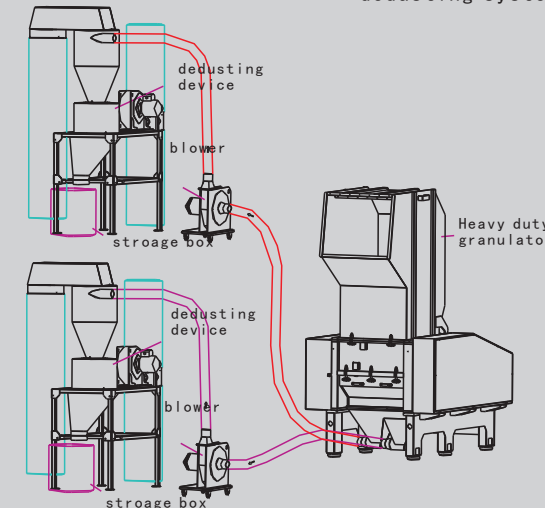

Specifications

Model		RG-66100S	RG-66120S	RG-66140S
Power	kw	75	90	110
Rotor speed	rpm	450	450	450
Rotating blades	PCS	6	6	6
Fixed blades	PCS	4	4	4
Screen diameter	mm	φ12	φ12	φ12
Cutting chamber size	mm	870X1000	870X1200	870X1400
Output	kg/h	1500~2500	1800~2800	2000~3000
Noise	dB (A)	100~120	100~120	100~120
Hydraulic controller for feeding-hopper		●	●	●
Hydraulic controller for screen bed		●	●	●
Blower conveying system		5.5KWX2 ●	5.5KWX2 ●	5.5KWX2 ●
Material box		○	○	○
		○	○	○
Weight	kg	4960	6200	7800
(L×W×H) External size	mm	2290X1980X3280	2290X2140X3280	2290X2340X3280

Please excuse for not note if some specifications of products are changed.

Note:

- 1) ● "is standard allocation, " ○ "is selection purchase.
- 2) "V" shaped paddle blades type is standard allocation.
- 3) The max. shredding quantity depend on the mesh hole diameter and shredding material quality.
- 4) The machine voltage specification is 3Φ, 380V, 50Hz. The voltage can be changed as you require.

