

RSM smaller spiral mixers



RM vertical mixers



RSM big spiral mixers



Plastic mixers are suitable for granules mixing, such as regrind and raw material mixing, granules and color masterbatch mixing, granules and masterbatch powder mixing etc., it is characterized of mixing evenly and quickly. It is widely used for plastic extrusion, injection processing.



Ningbo Beilun Rhong Machinery Manufacturing Co., Ltd

Donggangqi, Xiaogang Subdistrict, Beilun,
Ningbo, Zhejiang Province, China.
T +86-574-55019010, 0086 137 7723 9417
F +86-574-55019017
E-mail: rhong@rhongmachines.com

更多咨询请访问:



wechat



website

www.rhongmachines.com

RSM smaller spiral mixers

RSM big spiral mixers

RM vertical mixers

RM series vertical color mixer suitable for powder and granule mixing, the ideal structure and appearance, easy and simple for operation, quick mixing with fine mixing result and also easy for clean and maintenance. It is mainly used for plastic mixing and stirring and as well as widely used in the departments of powder metallurgy, pharmacy, chemicals, foodstuff, ceramic ware

made of stainless steel body inside, vertical mixing blades, mixing evenly and quickly



proximity switch protection, cover opened, machine stop automatically

stainless steel discharge port optional purchase with suction box, to convey material into injection molding machine hopper by auto loader

24hr timer setting, stop automatically after reaching to set mixing time

Universal wheel easy to move

optional purchase with suction box, can conveying material to injection molding machine hopper by auto loader

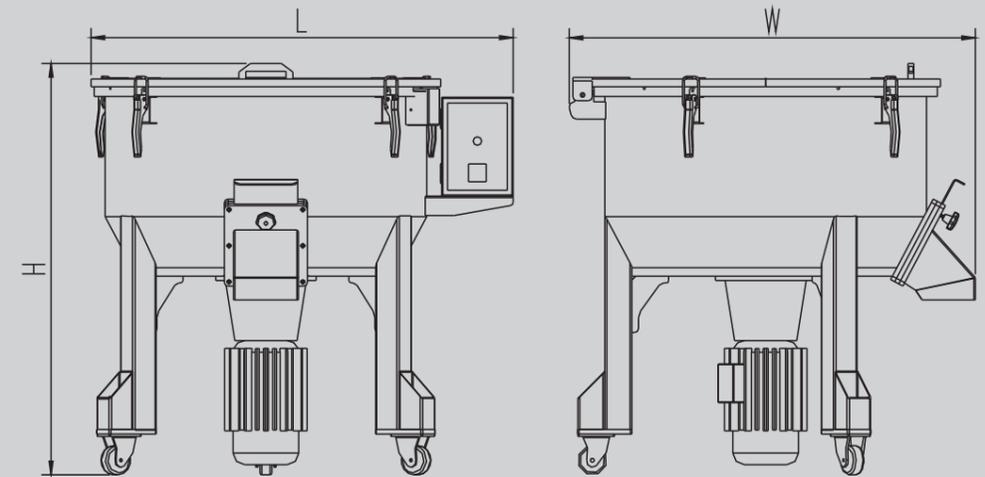

Specifications

Model		RM-25	RM-50	RM-100	RM-150	RM-200	RM-300
motor power	kw	1.1	1.5	3	4	5.5	11
Max-mixing capacity	kg/min	25/3	50/3	100/3	150/3	200/5	300/5
Rotor speed	rpm	80	80	80	80	80	80
Weight	kg	80	100	210	260	395	450
External size							
L	mm	700	860	1100	1100	1250	1250
W	mm	610	800	1050	1050	1220	1220
H	mm	920	1000	1060	1330	1400	1860

Please excuse for not note if some specifications of products are changed.

Note:

- 1) in general the mixing time is 5-10 minutes.
- 2) The voltage specification of machine is 3Φ, 220/380V, 50Hz. The voltage can be changed as you require.