



RDM series dryer is a quick-drying machine for plastic and rubber raw material drying, it can dry the humidified raw material caused by packing, transportation and retrieving. The direct-type bunker is especially suitable for installed on the plastic-rubber injection molding machinery carrying out drying. All types of machines, the 24-hours timer are available.

Tranparent eye-glass window, can check working situation at any time.

Stainless steel barrel, can open it, easy to clean material, change material quickly.

Hot wind extending device in high efficiency,the hot wind are distributed evenly, can promote the drying efficiency.



Micro-computer P.I.D temperature controller, real time display of real value and set value.

Special hot-air winding pipe design, guarantee wind sending in a smooth going way, its benefit to maintenance.

Transparent eye-glass magnet plinth.

Optional spare parts



Magnetic Base



Hot wind recovery equipment




24-hours timer

Technical Parameter

Auxillary Equipmet For Plastic Injection Machine



Optional purchase:
With PID computer panel
RDM-P series

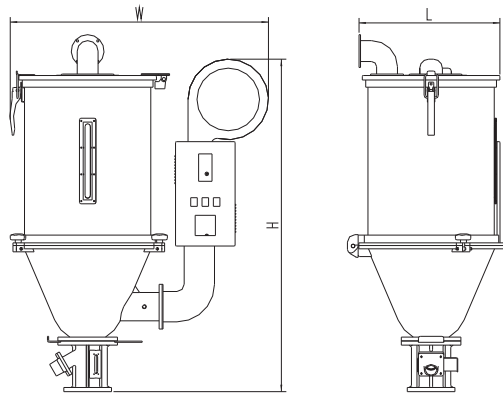

Specifications

Model		RDM -12	RDM -25	RDM -50	RDM -75	RDM -100	RDM -150	RDM -200	RDM -300	RDM -400	RDM -500	RDM -600
Material loading	kg	12	25	50	75	100	150	200	300	400	500	600
Heat power	kw	1.5	3	4	4	5.5	6	12	15	18	20	22
Blower power	w	75	135	155	155	210	215	320	320	340	340	1030
Applicable injectors	oz	1	3	5-8	5-8	10-20	10-20	20-30	20-30	30-50	30-50	30-50
Common base (E)	-	●	●	●	●	●	●	●	●	●	●	●
Magnet Base	-	○	○	○	○	○	○	○	○	○	○	○
Automatic timer (AT)	-	○	○	○	○	○	○	○	○	○	○	○
Micro-computer controlled with timing erformance (DT)	-	○	○	○	○	○	○	○	○	○	○	○
Warm-keeping layer	-	○	○	○	○	○	○	○	○	○	○	○
Weight	kg	20	25	32	35	55	60	150	160	230	240	260
External size												
	W	mm	650	700	850	850	970	970	1250	1250	1400	1400
	L	mm	300	400	500	550	600	600	800	800	900	950
	H	mm	750	950	1100	1310	1150	1700	1570	1900	1900	2150

Please excuse for not note if some specifications of products are changed.

Note:

- 1) "●" is standard allocation, "○" is selection purchase.
- 2) There are some small difference in quantity due to the difference density of various plastics.
- 3) The machine voltage specification is 30, 380V, 50Hz. The voltage can be changed as you require.