




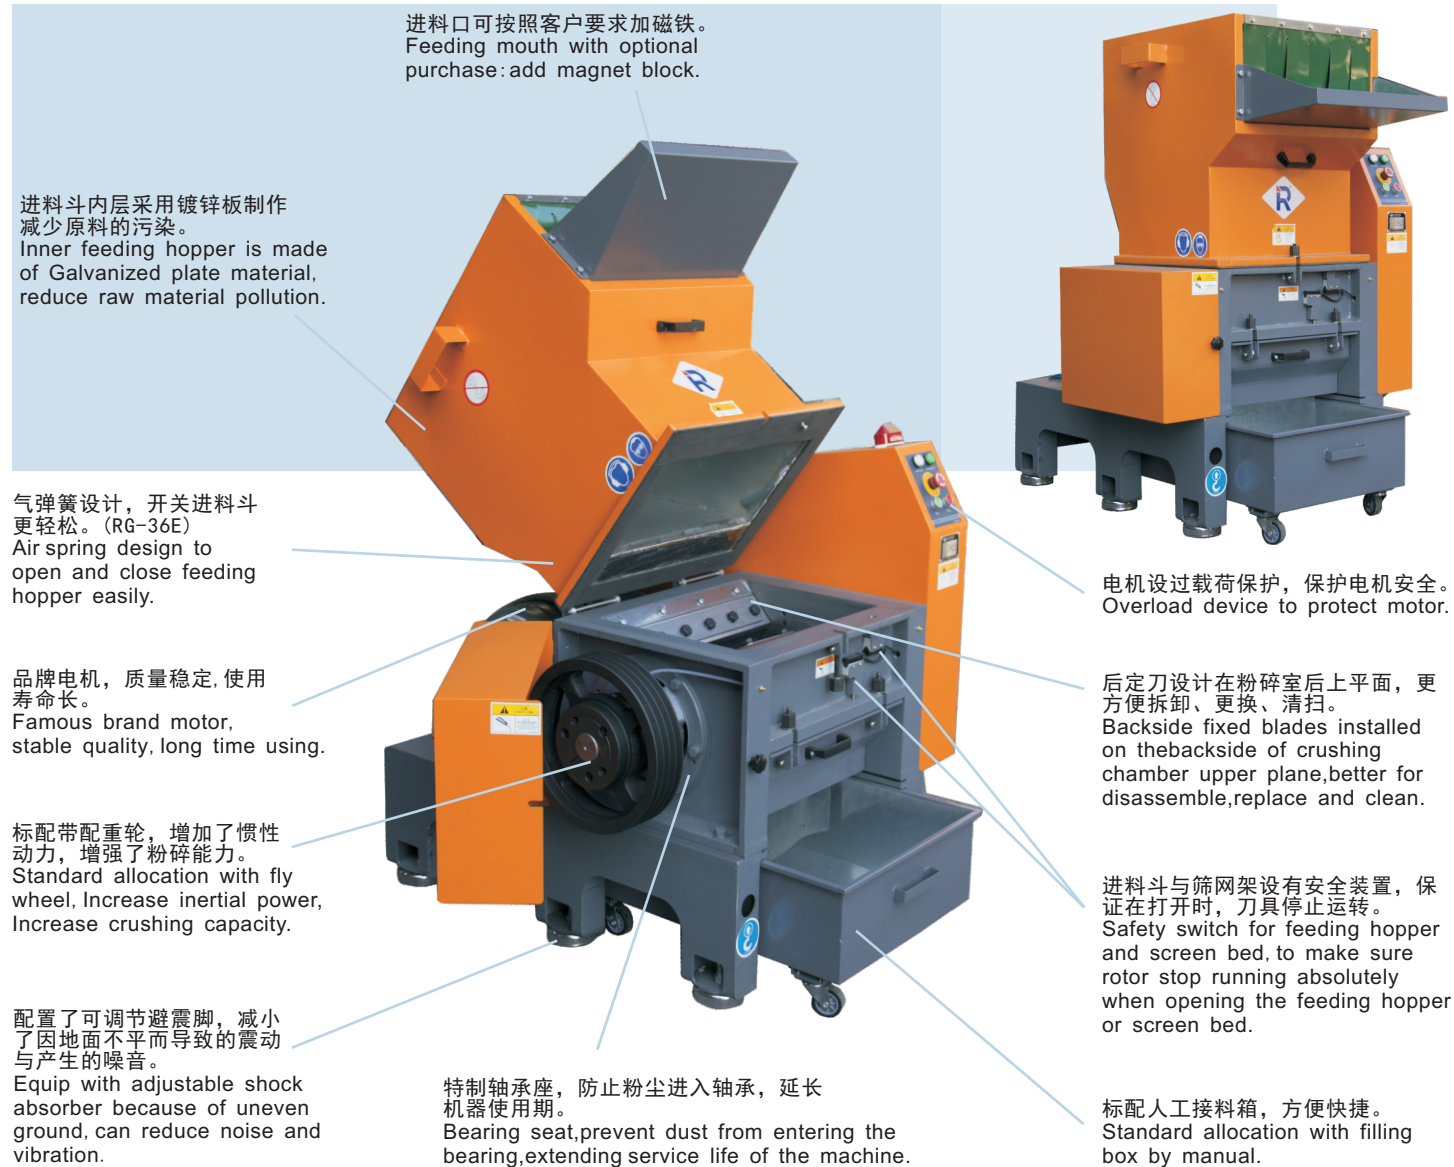


特写 Close-up

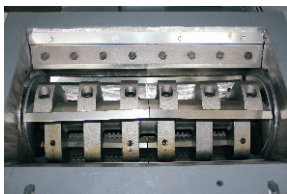

RG-26E/36E  
片刀型  
Paddle blades type

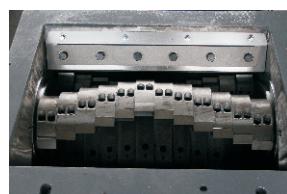

RG-26EA/36EA  
爪刀型  
Staggered blades type

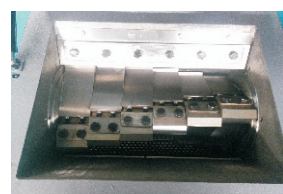

RG-26EB/36EB  
平刀型  
Flat blades type

/// 刀具采用“V形”切割技术, 切削时物料从两侧向中心滑动, 避免  
材料与机器侧壁的摩擦与堵塞。

多种刀架设计可供客户选择:


- 1). 若为硬质球状料则选用爪刀型粉碎机;
- 2). 若材料为薄壁壳管类、瓶类的产品需破碎回收要选用片刀型粉碎机;
- 3). 粉碎普通片材、管材、型材及包装材料等制品两种(平、片刀型)  
粉碎机均可选用;  
片刀型粉碎机是粉碎回收薄膜及薄片材的首选设备。

/// V type arrangement design, during crushing process material  
will be crushed in claw blades center point, avoid friction and  
blockage between material and side wall.


How to choose the correct blades type:

1. If hardness block material, please choose staggered blades  
type central granulators.
2. If Thin-walled housing, bottles, please choose paddle blades  
type central granulators.
3. If sheet, pipe, profile and package material, with two choice,  
flat or paddle blades type central granulators all ok.  
Attention: paddle type central granulators better for crushing  
film and thinner sheet.

强力粉碎机安装示意图  
----风机送料  
Powerful granulator  
Installation diagram  
----blower system

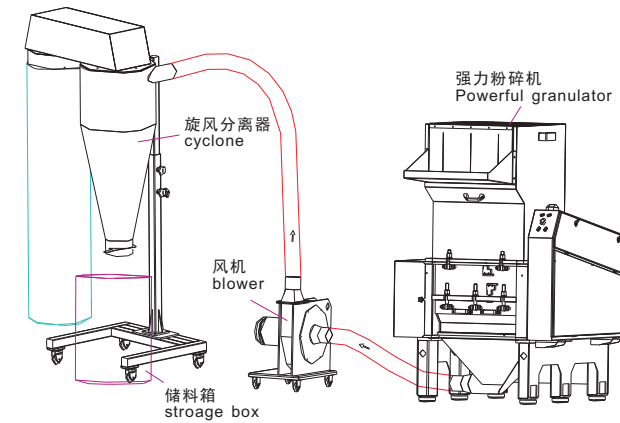

强力粉碎机安装示意图  
---风机送料+除尘装置  
Powerful granulator  
Installation diagram  
---blower system  
+dedusting system

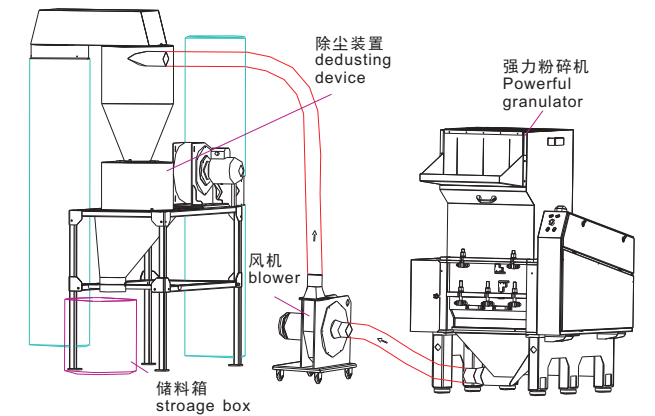

规格表Specifications

| 机型Model                           |        | RG-2630E      | RG-2640E      | RG-2650E       | RG-3660E       | RG-3670E       | RG-3680E       |
|-----------------------------------|--------|---------------|---------------|----------------|----------------|----------------|----------------|
| 电机功率 Power                        | kw     | 5.5           | 7.5           | 11             | 15             | 18.5           | 22             |
| 主轴转速 Rotor speed                  | rpm    | 560           | 560           | 560            | 560            | 560            | 560            |
| 活动刀<br>Rotating blades            | pcs    | 3             | 6             | 6              | 6              | 6              | 6              |
|                                   | -A pcs | 18            | 24            | 30             | 30             | 36             | 42             |
|                                   | -B pcs | 9             | 12            | 15             | 18             | 21             | 24             |
| 固定刀 Fixed blades                  | pcs    | 2             | 2             | 2              | 4              | 4              | 4              |
| 筛网孔径 Screen diameter              | mm     | φ 10          | φ 10          | φ 10           | φ 12           | φ 12           | φ 12           |
| 进料口尺寸 Feeding mouth               | mm     | 260X300       | 260X400       | 260X500        | 360X600        | 360X700        | 360X800        |
| 粉碎室尺寸<br>Cutting chamber size     | mm     | 370X300       | 370X400       | 370X500        | 480X600        | 480X700        | 480X800        |
| 粉碎能力 Output                       | kg/h   | 270~350       | 300~450       | 350~550        | 400~700        | 500~800        | 600~900        |
| 粉碎时噪音 Noise                       | dB (A) | 80~95         | 80~95         | 80~95          | 80~95          | 80~95          | 80~95          |
| 人工接料箱 Material box                |        |               |               |                |                |                |                |
| 风机送料系统<br>Blower conveying system | -F kw  | 2.2           | 2.2           | 2.2            | 3.0            | 3.0            | 3.0            |
| 除尘装置<br>Dedusting device          | -D kw  | 1.5           | 1.5           | 1.5            | 1.5            | 1.5            | 1.5            |
| 进料口加磁铁<br>Magnet at feeding mouth |        |               |               |                |                |                |                |
| 重量 Weight                         | kg     | 495           | 620           | 720            | 1100           | 1180           | 1295           |
| 外形尺寸(L×W×H)<br>External size      | mm     | 1420X820X1410 | 1420X920X1410 | 1420X1020X1410 | 1760X1170X1840 | 1760X1270X1840 | 1760X1370X1840 |

产品规格若有变更, 恕不另行通知。 Please excuse for not note if some specifications of products are changed.

Note 注:

- 1) "●" 为标配, "○" 为选购。  
"●" is standard allocation, "○" is selection purchase.
- 2) 标配为片刀型结构, "-A" 为爪刀型结构, "-B" 为平刀型结构。  
"V" shaped paddle blades type is standard allocation,  
"-A" means claw blades type (staggered blades type),  
"-B" means flat blades type.
- 3) 最大粉碎量取决于筛网孔径及粉碎材料等因素。  
The max. shredding quantity depend on the mesh hole  
diameter and shredding material quality.
- 4) 机器电压规格为3Φ, 380V, 50Hz。  
The machine voltage specification is 3Φ, 380V, 50Hz.  
The voltage can be changed as you require.

